


- 焊接隔膜
- 耐泥漿. 耐腐蝕
- 隔膜材料範圍廣泛
- 此隔膜密封可安裝於壓力錶. 開關. 傳送器等, 為阻隔具有腐蝕性.黏性與自然沉澱的傳感元件, 以避免阻塞和固化



規格特性

- ◆範圍：-1kg/cm²~21kg/cm²
- ◆工作溫度：-40°C~200°C 或根據每次填充液
- ◆本體牙口：3/8" BSP(F)
- ◆接續牙口：Flange (as per DIN/ BS/ ANSI/ JIS)
Finish 125~250AARN
32NB (1 1/4") to 80NB (3") (as required)
- ◆隔膜材質：AISI316L SS
- ◆密封閥材質：AISI316 SS
- ◆填充油：矽油-DC200

尺寸圖

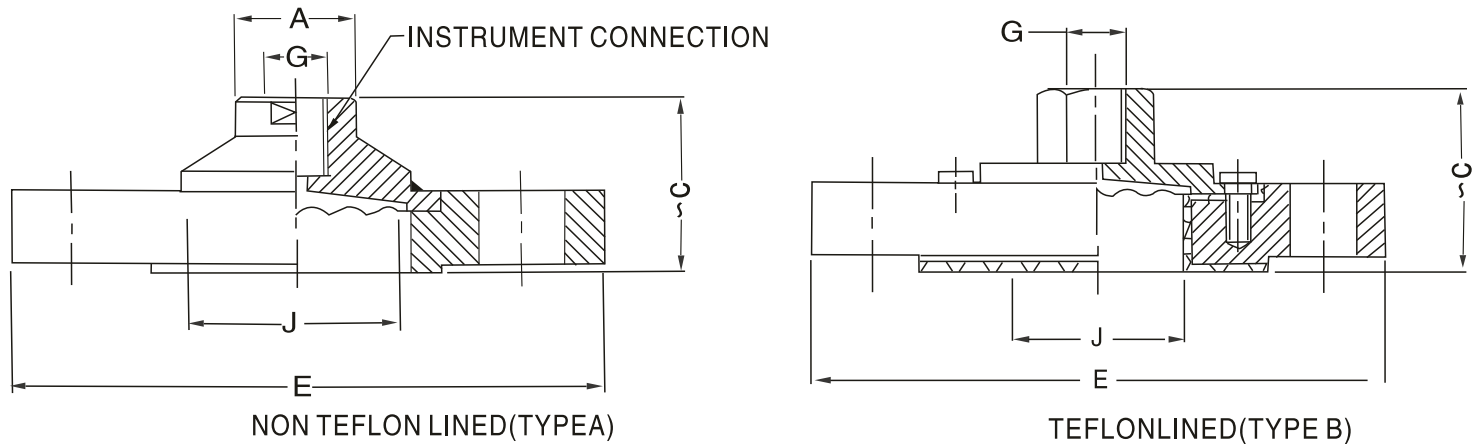

A	~C	E	G	J
30	44.5	**	3/8" BSP(M)	***

**as per standard flange table ANSI, DIN, BS, JIS Etc.,
***DIAPHRAGM DIA. TO SUIT FLANGE

Note: ● Due to continuous improvement, the specification may vary from time to time.

選用型號規格

BASIC MODEL

OPTIONS

FOR NON STANDARD PRODUCTS/OPTIONAL ITEMS, PLEASE CONTACT FACTORY FOR DELIVERY AND MINIMUM QUANTITY OF ORDER.

FLANGE 法蘭

L1 AISI 316L SS L4 CARBON STEEL
L2 AISI 316 SS

DIAPHRAGM 隔膜

M1 AISI 316L SS M2 NICKEL M3 TITANIUM
M4 HASTELLOY'C' M5 SILVER M6 PTFE(FOR TYPE A ONLY)
M6 MONEL M7 TANTALUM

INSTRUMENT CONNECTION 本體牙口

Q1 1/2"BSP(F) Q5 3/8"NPT(F)
Q2 1/4"BSP(F) Q4 1/2"NPT(F)
Q6 3/8NPT(F) Q3 1/4"NPT(F)

PROCESS CONNECTION 接續牙口

AS PER DIN/BS/ANS/JIS ETC.STANDARD
32NB(11/4")to 80NB(3")(As required)

FLUSHING RING 活動環

S1 FLUSHING RING WITH 1/2"NPT PLUG(AISI 304 SS) S2 FLUSHING RING WITH 1/4"NPT PLUG(AISI 304 SS)
S3 FLUSHING RING WITH 1/2"NPT PLUG(AISI 316 SS) S4 FLUSHING RING WITH 1/4"NPT PLUG(AISI 316 SS)Std.

FILLING FLUIDS 填充液

T1 FLUROLUBE 4.2[-45 TO 175°C/-49 TO374 ° F] T2 SILICON DC 704 [0 TO 205°C/-32 TO401 ° F]
T3 FLUROLUBE 6.3[-40 TO 235°C/-40 TO455 ° F] T4 SILICON DC 710 [5TO 345°C/-41 TO653 ° F]
T5 FLUROLUBE FS5[-40 TO 150°C/-40 TO302 ° F] T6 SYLTHERM 800 [-45 TO205°C/-49 TO401° F]
T7 FOOD GRADE OIL[-20 TO 140°C/-4 TO284 ° F] T8 SYLTHERM XLT [-75 TO150°C/-102TO302° F]
T9 SILICON DC200-10CS[-40 TO 205°C/-40 TO401 ° F] T10 HALOCARBON OIL

PROTECTION ON WETTED PARTS

U1 PTFE LINING ON FLANGE-2mm THICK U3 PTFE PROTECTION FOR DIAPHRAGM

DIAPHRAGM MATERIAL 隔膜材質

AD1 AISI 304 AD6 MONEL AD7 HASTELLOYC AD2 CARBON STEEL
AD5 AISI 316L SS AD3 TITANIUM AD4 AISI 316 SS

TYPE

G1 WITHOUT CAPILLARY G2 WITH CAPILLARY

CAPILLARY

H1 AISI 304 SS H2 AISI 316 SS

CAPILLARY COVERED WITH ARMOUR

I1 AISI 304 SS I2 AISI 316 SS I3 PVC

CAPILLARY LENGTH(Max up to 6Mtrs.)

IN METERS (e.g.1.5= 1.5METERS 2.0=2METERS)

OTHER ORTIONS

K3 HELIUM LEAK TEST K4 DRY SEAL ONLY WITHOUT INSTRUMENT

Ordering Example:

BBX-L1-M1-Q1-B27-S1-T1-U1-AD1-G1-H1-I1-3Mtr.-K3

Note: · Due to continuous improvement, the specification may vary from time to time.

BBX

L1

M1

Q1

B27

S1

T1

U1

AD1

G1

H1

I1

3Mtr.

K3