


- 焊接隔膜
- 沖洗隔膜
- 易於清潔
- 耐泥漿. 耐腐蝕
- 此隔膜密封可安裝於壓力錶. 開關. 傳送器等, 為阻隔具有腐蝕性. 黏性與自然沉澱的傳感元件, 以避免阻塞和固化



規格特性

- ◆範圍：-1kg/cm²~21kg/cm²
- ◆工作溫度：-40°C~200°C 或根據每次填充液
- ◆本體牙口：3/8" BSP(F)
- ◆接續牙口：Flange (as per DIN/ BS/ ANSI/ JIS)
Finish 125~250AARN
32NB (1 1/4") to 80NB (3") (as required)
- ◆隔膜材質：AISI316LSS
- ◆密封閥材質：AISI316SS
- ◆填充油：矽油-DC200

尺寸圖

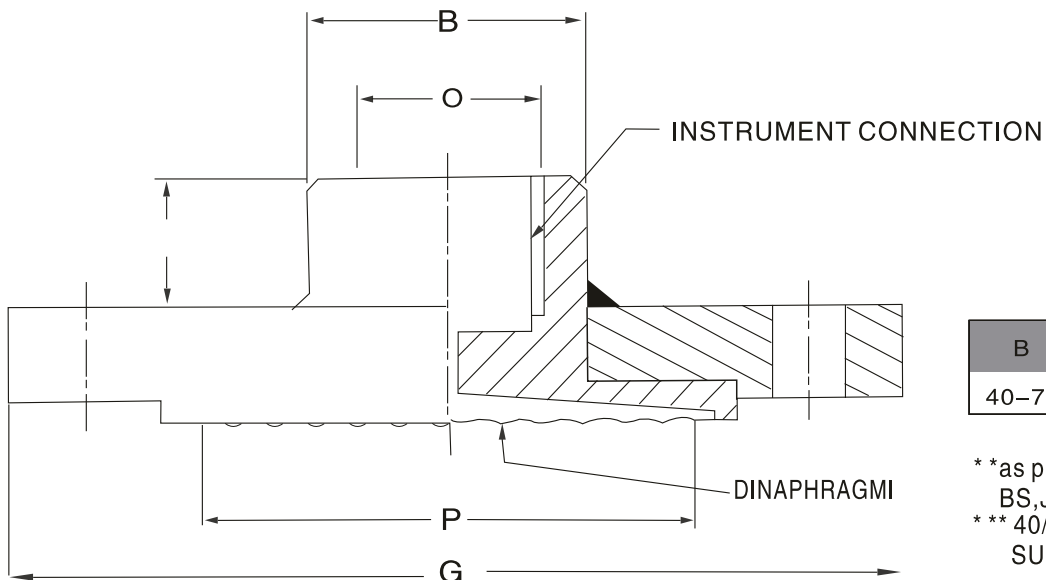

B	G	N		
40-70	**	20	3/8"BSP(F)	***

**as per standard flange table ANSI, DIN, BS, JIS ETC.,

*** 40/53/63/70mm DIA. DIAPHRAGM TO SUIT FLANGE

Notes: • Drawings are not to scale. • All Dimensions are in mm.

選用型號規格

BASIC MODEL

BBW

OPTIONS

FOR NON STANDARD PRODUCTS/OPTIONAL ITEMS, PLEASE CONTACT FACTORY FOR DELIVERY AND MINIMUM QUANTITY OF ORDER.

FLANGE 法蘭

M1 AISI 316L SS

M1

INSTRUMENT CONNECTION 本體牙口

Q1 1/2"BST(F) **Q4** 1/2"NPT(F)
Q2 1/4"BSP(F) **Q3** 1/4"NPT(F)
Q5 3/8"NPT(F) **Q6** 3/8"BSP(F)

Q1

PROCESS CONNECTION 接續牙口

AS PER DIN/BS /ANSI/JIS (SELECT CODE FROM TABLE)

B33

FIUSHING RING 活動環

S1 FLUSHING RING WITH1/2"NPT PLUG (AISI 304 SS) **S2** FLUSHING RING WITH1/4"NPT PLUG (AISI 316 SS)
S3 FLUSHING RING WITH1/2"NPT PLUG (AISI 316 SS) **S4** FLUSHING RING WITH1/4"NPT PLUG (AISI 316 SS)Std.

S1

FILLNG FLUIDS 填充液

T1 FLUROLUBE 4.2[-45 TO 175°C/-49 TO374 ° F] **T2** SILICON DC 704 [0 TO 315°C/-32 TO599 ° F]
T3 FLUROLUBE 6.3[-40 TO 235°C/-40 TO455 ° F] **T4** SILICON DC 710 [5TO 345°C/-41 TO653 ° F]
T5 FLUROLUBE FS5[-40 TO 150°C/-40 TO302 ° F] **T6** SYLTHERM 800 [-45 TO205°C/-49 TO401° F]
T7 FOOD GRADE OIL[-20 TO 140°C/-4 TO284 ° F] **T8** SYLTHERM XLT [-75 TO150°C/-102TO302° F]
T9 SILICON DC200-10CS[-40 TO 205°C/-40 TO401 ° F] **T10** HALOCARBON OIL

T1

PROTECTION ON WETTED PARTS

U2 PTFE PROTECTION FOR DIAPHRAGM

U2

DIAPHRAGM 隔膜材質

AD1 AISI 304 SS **AD2** CARBIB STEEK **AD3** TITAIUUN **AD4** AISI 316 SS
AD5 AISI 316L SS **AD6** MONEL **AD7** HASTELLOYS C

AD1

TYPE

G1 WITHOUT CAPILLARY **G2** WITH CAPILLARY

G1

CAPILLARY

H1 AISI 304 SS **H2** AISI 316 SS

H1

CAPILLARY COVERED WITH ARMOUR

I1 AISI 304 SS **I2** AISI 316 SS

I1

CAPILLARY LENGTH(Max up to 2Mtrs.)

IN METERS (e.g. 1.5)=1.5METERS 2.0=2METERS)

1Mtr.

OTHER OPTIONS

K3 HELIUM LEAK TEST **K4** DRY SEAL ONLY WITHOUT INSTRUMEN

K3

Ordering Example:

BBW-M1-Q1-B33-S1-T1-U2-AD1-G1-H1-I1-1Mtr.-K3

Note: ● Due to continuous improvement,the specification may vary from time to time.