


- 輸入: 數位輸入16組
- 輸出: RS-485

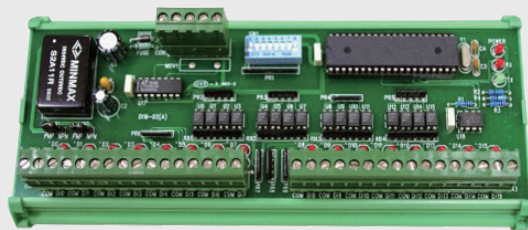

規格特性

- ◆ 通道 : 16
- ◆ 輸入 : Digital input
- ◆ 操作溫度 : 0~60°C / Below 80%R.H.
- ◆ 儲存溫度 : -10~70 / Below 70% R.H.
- ◆ 供電 : DC 24±20%
- ◆ 介電強度 : AC 1500V/1min (Input/ Power)
- ◆ 絕緣電阻 : More than 100M at 500VDC
- ◆ 安裝方式 : DIN rail
- ◆ 尺寸 : 203(W) x 81(H)mm
- ◆ 輸出 : RS-485
- ◆ 通訊協定 : Modbus RTU mode
- ◆ 鮑率 : 9600 or 19200

指撥開關



1~6 Pin 設定位址 : 01~64



7 Pin設定 Frame : OFF→N.8.1
ON→N.8.2

8 Pin 設定鮑率 : OFF→9600
ON→19200



A/D : 12 bit

配線圖

● 3 組電壓 + 3 組電流 (貫穿式 CT)

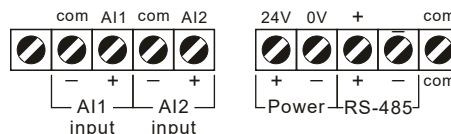

● 6 組電壓

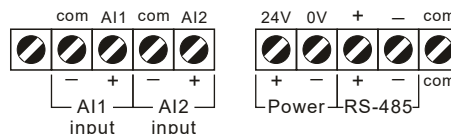

● 6 組勾式 CT

