

■ PT-100 class A

01C.D1797 P0K1.232.6W.A.008



- ◆ Resistivity(電阻率): 100Ω at 0 °C
- ◆ Tolerance(容許度): DIN EN 60751 F 0.15
- ◆ T.-Range(溫度範圍): -200 °C-+600 °C
- ◆ Dimension(尺寸): 2.3x2x1.3mm(LxWxH)
- ◆ Contacts: Pt/Ni-wire, Ø0.2mm, 3mm long

*RoHS compliant(符合RoHS規格)

■ K type class A

- ◆ Thickness(Min): 0.25mm
- ◆ Thickness(Max): 0.26mm
- ◆ Voltage Test(電壓測試): 100 Vx1min
- ◆ Room Temp(室溫): 26 °C
- ◆ Humidity(濕度): 48%
- ◆ Insulation Resist(絕緣電阻): 20MΩ up

*RoHS compliant(符合RoHS規格)

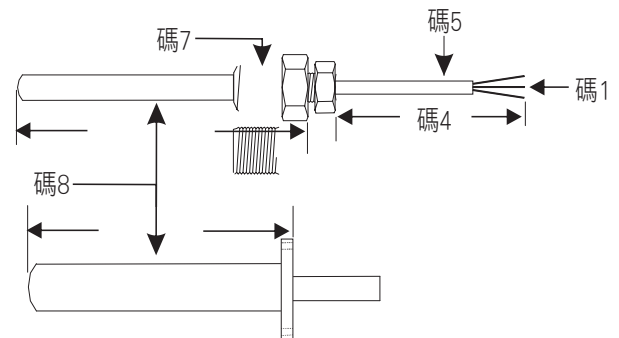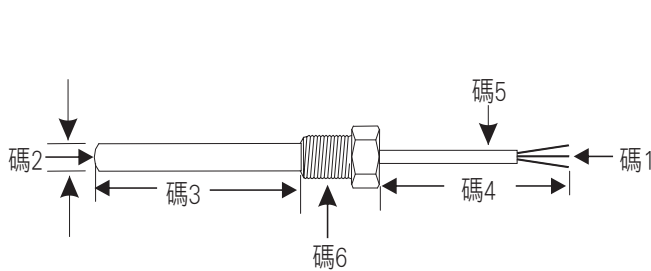

選用型號規格

BTL - 代碼1 代碼2 - 代碼3 - 代碼4 代碼5 - 代碼6 - 代碼7 代碼8

碼1	輸入種類
K	K Type
J	J Type
E	E Type
T	T Type
R	R Type
S	S Type
B	B Type
C	C Type
P	RTD (PT-100)

碼2	管徑
3	3.2 mm
4	4.8 mm
5	5.0 mm
6	6.3 mm
9	9.5 mm
A	12.3 mm
O	Option

碼3	管長
03	30 mm
05	50 mm
08	80 mm
10	100 mm
20	200 mm
30	300 mm
50	500 mm
80	800 mm
A0	1000 mm
B0	2000 mm
O	Option

碼4	接線長度
01	1 M
02	2 M
03	3 M
10	10 M
20	20 M
30	30 M
40	40 M
A0	100 M
B0	200 M
O	Option

碼5	接線材質
C	玻纖線
D	耐溫線
F	鐵網線
P	PVC線
T	鐵氟龍線
O	Option

碼6	螺牙方式
N	None
1	1/4" PT
2	3/8" PT
3	1/2" PT
4	3/4" PT
5	1" PT
A	1/4" NPT
B	3/8" NPT
C	1/2" NPT
D	3/4" NPT
E	1" NPT
O	Option

碼7	內管管徑
3	3.2 mm
4	4.8 mm
5	5.0 mm
6	6.3 mm
9	9.5 mm
A	12.3 mm
O	Option

碼8	外套管型式
N	None
1	高溫50mm
2	滑管
3	法蘭
4	鐵氟龍管
5	磁管
6	鈦管
O	Option