

10W LED 6 Inch Downlight

GS60 Series

Feature:


- Low energy consumption
- No UV, IR and mercury
- Long lifespan
- No flicking and FR interference
- No delay on start
- Aluminum heat sink



Order Information:

Part Number	Color Temperature (°K)	View Angle(°)	CRI (%)	Luminous (lm)
	Typical			Typical
GS60DL10-001-VA5-TL01	6000 ±300	90	70	800 ±10%
GS60DL10-001-VA1-TL01	3000 ±200	90	70	700 ±10%

Cut-Out Dimensions :

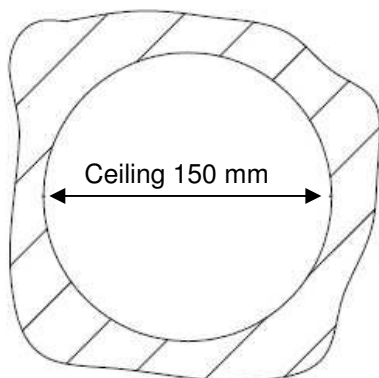

Mechanical:

Parameter	Rating
Case	Aluminum
Lens	Fog type
Weight	150 g

Environmental:

Parameter	Rating
Relative Humidity	5~90%
Operating Temperature	0~50°C
Storage Temperature	-20~60°C

Power supply:

Parameter	Rating
Input Voltage	AC 100-240V
Power Consumption	10W ±10%
Power Factor	>0.9