



- Programmable display by RS-485 communication
- High brightness 0.8"/0.8"/0.56 LED display range: -9999~9999/-19999~99999/-199999~999999; decimal point selectable.
- Communication reading by Master/writing to slave.
- High stability, non-flammable case (PC), high safety
- CE approval

SPECIFICATION


- ◆ Display Screen: High brightness red LED
20.3mm(0.8")/20.3mm(0.8")/14.2mm(0.56")
- ◆ Display Range: -9999~9999/-19999~99999/-199999~999999
- ◆ Parameters Setting: Push buttons
- ◆ Back Up Memory: EEPROM
- ◆ Communication: RS-485 Modbus RTU mode(Master/Slave)
- ◆ Baud Rate: 19200 / 9600 / 4800 / 2400 bps
- ◆ Temperature Coefficient: 100ppm / °C (0~60°C)
- ◆ Operating Temperature: 0~60°C
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70°C
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC/DC 100~240V; DC 22~50V
- ◆ Power Consumption: 6.5VA (all functions output)
- ◆ Surge Test: 2KVac / 1min (Input / Power)
- ◆ Dimensions: 96(W)*48(H)*85(D) mm
- ◆ Weight: About 0.3kg

ORDER INFORMATION

MS4/5/6 - [Code1] - [Code2]

Code1	Aux. Power	Code2	Communication
A	AC/DC 100~240V	M	Master
C	DC 22~50V	S	Slave

WIRING CONNECTION

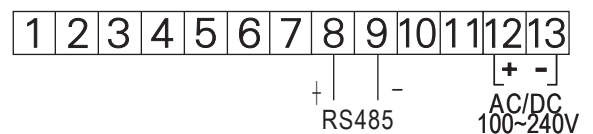

DIMENSION

