

- Split Core, easy installation.
- Primary Input 100A~600A.
- Secondary output 1A.
- Safe operation



SPECIFICATION

- ◆ Frequency: 50~60 Hz
- ◆ Rated Current: 100A to 600A loads
- ◆ Rated Output: 1A (AC)
- ◆ Accuracy: Class 0.5 or 1 from 20% to 120% of rated current
- ◆ Phase angle: Less than 2 degrees at 50% of rated current
- ◆ Insulation Voltage: 600 Vac
- ◆ Maximum Primary Voltage: 5000 Vac (Insulated Conductor)
- ◆ Dielectric Strength: 2.5KV/ 1mA/ 1min
- ◆ Operating Temperature: -15°C to 60°C
- ◆ Operating Humidity: <85%
- ◆ Case Material: PC/UL94~V0
- ◆ Bobbin: PBT
- ◆ Core: Permalloy
- ◆ Internal Structure: Epoxy
- ◆ Burden: 100/ 1A Ø24mm
200/ 1A Ø24mm
300/ 1A Ø24mm
400/ 1A Ø36mm
500/ 1A Ø36mm
600/ 1A Ø36mm


ORDER INFORMATION

DCSCT - Code1 - Code2

Code1	Input Signal	Code2	Output
100	100 Aac	1A	1 Aac
200	200 Aac		
300	300 Aac		
400	400 Aac		
500	500 Aac		
600	600 Aac		

DIMENSION

● Burden: 100/ 1A, 200/ 1A, 300/ 1A

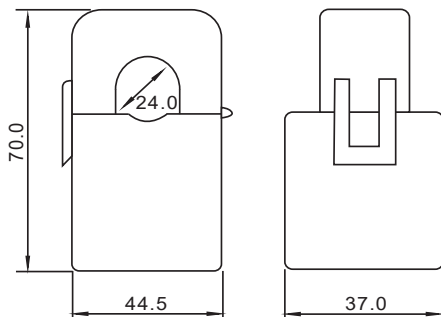

● Burden: 400/ 1A, 500/ 1A, 600/ 1A

