

■ PT-100 class A

01C.D1797 P0K1.232.6W.A.008



- ◆ Resistivity(電阻率): 100Ω at 0 °C
- ◆ Tolerance(容許度): DIN EN 60751 F 0.15
- ◆ T.-Range(溫度範圍): -200 °C-+600 °C
- ◆ Dimension(尺寸): 2.3x2x1.3mm(LxWxH)
- ◆ Contacts: Pt/Ni-wire, Ø0.2mm, 3mm long

*RoHS compliant(符合RoHS規格)

■ K type class A

- ◆ Thickness(Min): 0.25mm
- ◆ Thickness(Max): 0.26mm
- ◆ Voltage Test(電壓測試): 100 Vx1min
- ◆ Room Temp(室溫): 26 °C
- ◆ Humidity(濕度): 48%
- ◆ Insulation Resist(絕緣電阻): 20MΩ up


*RoHS compliant(符合RoHS規格)

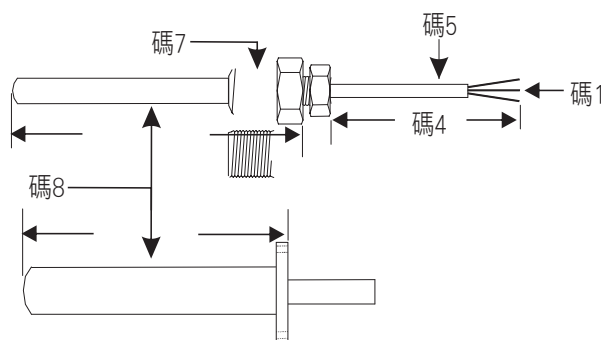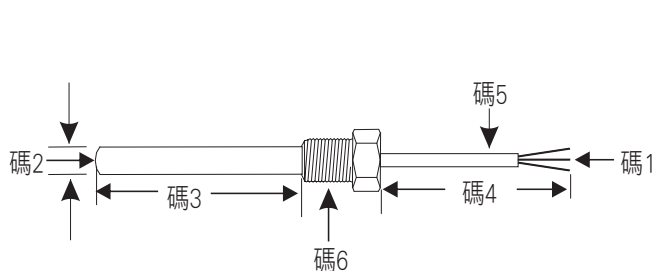


選用型號規格

BTL - 代碼1 - 代碼2 - 代碼3 - 代碼4 - 代碼5 - 代碼6 - 代碼7 - 代碼8

碼1 輸入種類	碼2 管徑	碼3 管長	碼4 接線長度	碼5 接線材質	碼6 螺牙方式	碼7 內管管徑	碼8 外套管型式
K K Type	3 3.2 mm	03 30 mm	01 1 M	C 玻纖線	N None	3 3.2 mm	N None
J J Type	4 4.8 mm	05 50 mm	02 2 M	D 耐溫線	1 1/4" PT	4 4.8 mm	1 高溫50mm
E E Type	5 5.0 mm	08 80 mm	03 3 M	F 鐵網線	2 3/8" PT	5 5.0 mm	2 滑管
T T Type	6 6.3 mm	10 100 mm	10 10 M	P PVC線	3 1/2" PT	6 6.3 mm	3 法蘭
R R Type	9 9.5 mm	20 200 mm	20 20 M	T 鐵氟龍線	4 3/4" PT	9 9.5 mm	4 鐵氟龍管
S S Type	A 12.3 mm	30 300 mm	30 30 M	O Option	5 1" PT	A 12.3 mm	5 磁管
B B Type	O Option	50 500 mm	40 40 M		A 1/4" NPT	O Option	6 鈦管
C C Type		80 800 mm	A0 100 M		B 3/8" NPT		O Option
P 3RTD (PT-100)		A0 1000 mm	B0 200 M		C 1/2" NPT		
P1 4RTD (PT-100)		B0 2000 mm	O Option		D 3/4" NPT		
		O Option			E 1" NPT		
					O Option		

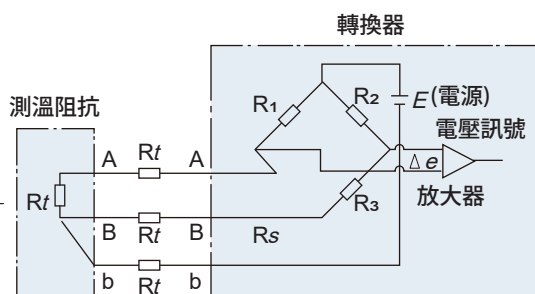

●P-3線式溫度測量電路

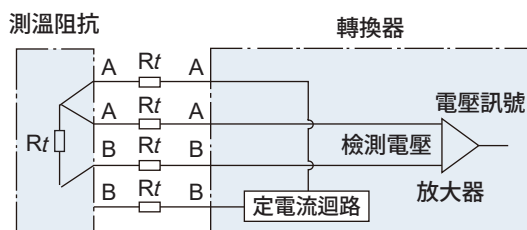

●P1-4線式溫度測量電路