


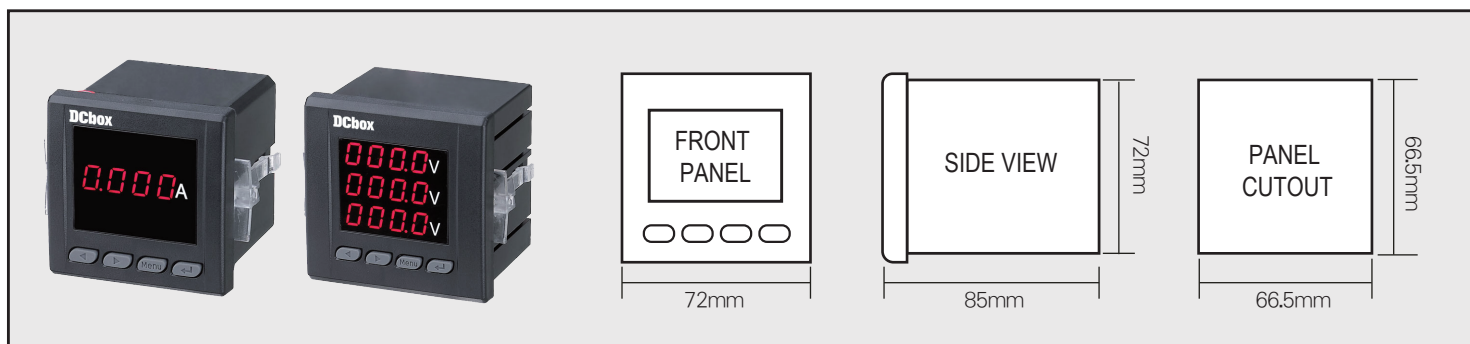

- Accuracy: $\pm 0.5\%$ F.S. ± 1 digit (AC)
- Measuring 1 to 3 phase AC, DC Current
- PT ratio/ CT ratio programmable.

SPECIFICATION

- ◆ Accuracy: $\pm 0.5\%$ F.S. ± 1 digit (AC)
- ◆ Sampling Cycle: 3 cycles / sec
- ◆ Display Range: -1999~9999
- ◆ Memory: EEPROM
- ◆ Temperature Coefficient: 100ppm / $^{\circ}\text{C}$ (0~60 $^{\circ}\text{C}$)
- ◆ Operating Temperature: 0~60 $^{\circ}\text{C}$
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70 $^{\circ}\text{C}$
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC/DC100~240V
- ◆ Power Consumption: 4.5VA
- ◆ Surge Test: 2KVac / 1min (Input / Power)


ORDER INFORMATION

DC72 - Code1 Code2 - Code3


Code1	Phase	Code3	Aux. Power
1	1 Phase	A	AC100~240V
3	3 Phase		
Code2 Input Type			
V	500V		
A	5A		

WIRING CONNECTION


● 1 ϕ Voltage/ Current



● 3 ϕ Current



● 3 ϕ 3W Voltage



● 3 ϕ 4W Voltage

