

- High brightness 0.27" LCD display: 0~999999
- Lock switch available for reset key
- Backup memory by internal battery
- Battery life: more than 6 years
- DIN size 24 x 48 mm; easy to install



SPECIFICATION

- ◆ Display Screen: High brightness LCD; 6.7mm(0.26")
- ◆ Display Range: 0~999999
- ◆ Back Up Memory: Internal Battery
- ◆ Battery Life: More than 6 years
- ◆ Temperature Coefficient: 100ppm /°C (0~60°C)
- ◆ Operating Temperature: 0~40 °C
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~60 °C
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: Internal Battery


ORDER INFORMATION

CL-6 [Code 1]


Code1	Input Signal
AL	AC/DC 90~240V
DL	DC 12~30V
CL	Contact

WIRING CONNECTION

● Voltage Input

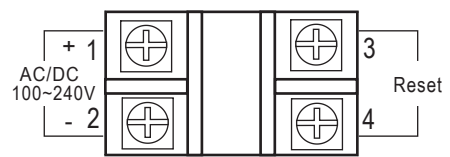

● Contact Input

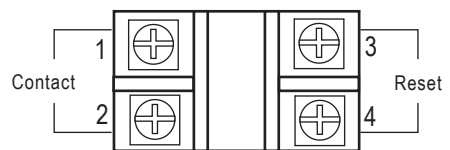

DIMENSION

