

- High brightness 0.27" LCD display: 0~999999
- Lock switch available for reset key
- Backup memory by internal battery
- Battery life: more than 6 years
- DIN size 24 x 48 mm; easy to install



SPECIFICATION

- ◆ Display Screen: High brightness LCD; 6.7mm(0.26")
- ◆ Display Range: 0~999999
- ◆ Back Up Memory: Internal Battery
- ◆ Battery Life: More than 6 years
- ◆ Temperature Coefficient: 100ppm / °C (0~60°C)
- ◆ Operating Temperature: 0~40°C
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~60°C
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: Internal Battery


ORDER INFORMATION

T [Code 1] - [Code 2]


Code1	Input Signal	Code2	Display Range
AL	AC/DC 90~240V	1	99999.9 hrs
DL	DC 12~30V	2	99 hrs, 59 mins, 59 sec
CL	Contact	3	9999 hrs, 59 mins
		4	9999 days, 23 hrs
		5	9999 hrs, 59 mins, 59 sec
		6	999999 hrs, 59 mins

WIRING CONNECTION

● Voltage Input

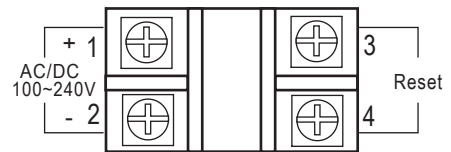

● Contact Input

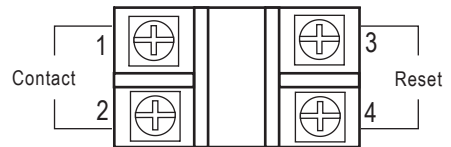

DIMENSION

